



2001 CEC 210-52-(B), (F)

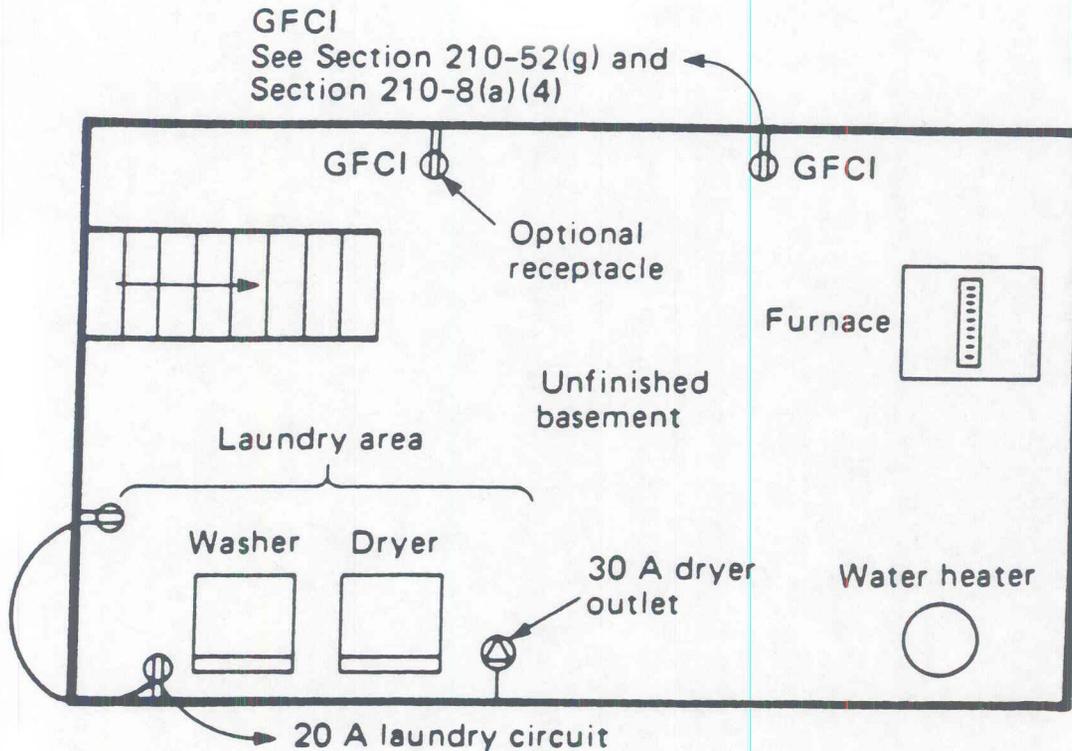


Figure 220-6. At least one 20-A branch circuit is required to supply the laundry receptacle outlet(s). Lighting outlets in laundry areas are not permitted to be connected to the laundry branch circuit. If the laundry area is in a basement or garage, this receptacle outlet is not considered as that required by Section 210-52(g).

(c) **Laundry Branch Circuits — Dwelling Unit.** In addition to the number of branch circuits determined in accordance with (a) and (b) above, at least one additional 20-ampere branch circuit shall be provided to supply the laundry receptacle outlet(s) required by Section 210-52(f). This circuit shall have no other outlets.

At least one additional 20-A branch circuit is required to be provided for the supply to the laundry receptacle outlet(s) required by Section 210-52(f). This circuit is to have no other outlets. Laundry receptacle outlets are not required in apartments or similar occupancies where there are common laundry facilities available to all occupants. In addition, a laundry outlet is not required if laundry facilities are not to be installed or permitted. See Figure 220-6.