




2001 UPC 908.0

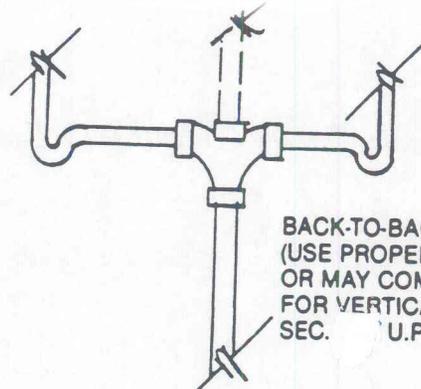


BACK-TO-BACK INSTALLATION
(USE PROPER FIGURE FITTING)
OR MAY COMPLY WITH THE RULES
FOR VERTICAL WET VENTING,
SEC. 908.0 U.P.C.

Figure 7-10

Tailpieces

The vertical distance between a fixture outlet and the trap weir shall be as short as practicable, but in no case shall the tailpiece from any fixture exceed twenty-four (24) inches (0.6 m) in length. (See Fig. 7-11.) This pipe is considered to be open drain piping and should be kept as short as possible. This distance requirement also applies to tailpieces in combination waste and vent systems.

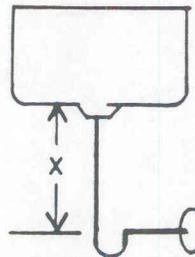


X = 24" maximum (0.6 m)

Figure 7-11

Standpipes for clotheswashers are an exception to the twenty-four (24) inch (0.6 m) requirement as the standpipe is considered to be a receptor rather than a tailpiece. Washing machine standpipes shall extend not more than thirty (30) inches (0.76 m), nor less than eighteen (18) inches (0.46 m) above their trap. (See Fig. 7-12.)

2001 UPC 804.1

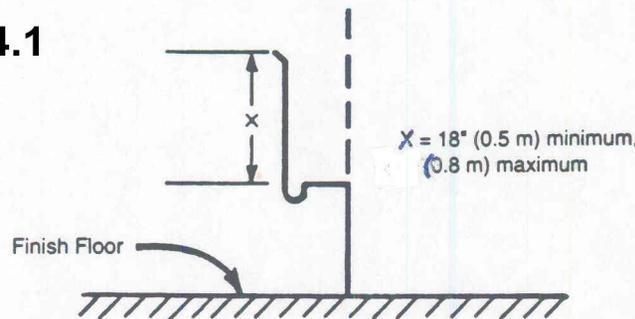

X = 18" (0.5 m) minimum,
30" (0.8 m) maximum

Finish Floor

Figure 7-12
Washing Machine Standpipe