





2001 CBC 1507, APPENDIX 1514

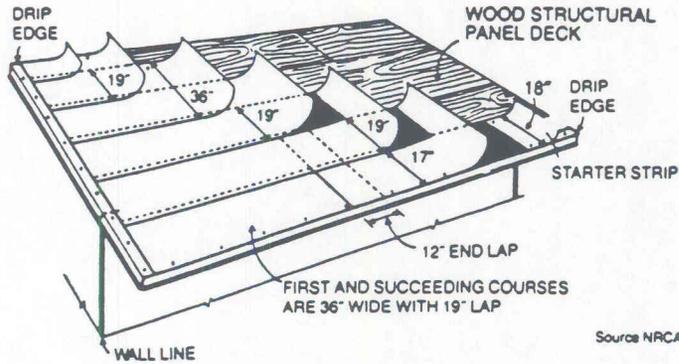


Source NRCA

LOW SLOPE (LESS THAN 4:12) UNDERLAYMENT APPLICATION

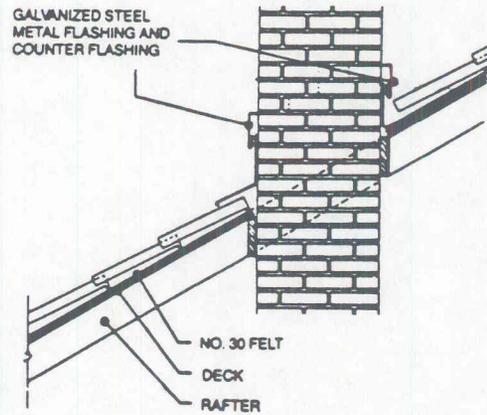


CHIMNEY FLASHING DETAIL

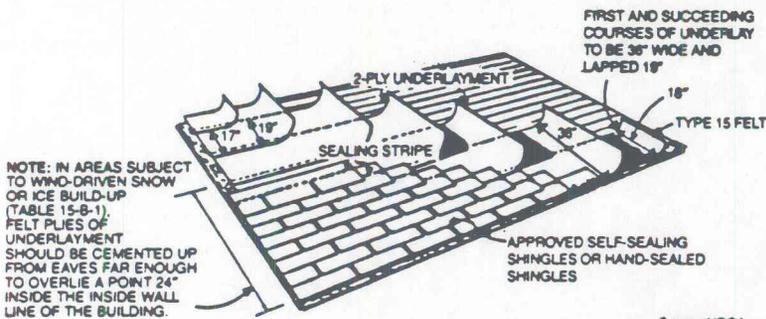

Source NRCA


APPLICATION OF ASPHALT SHINGLE SLOPES BETWEEN 2:12 AND 4:12

NAILING AS RECOMMENDED BY MANUFACTURER
MIN 36" WIDE TYPE 15 FELT OR HEAVIER

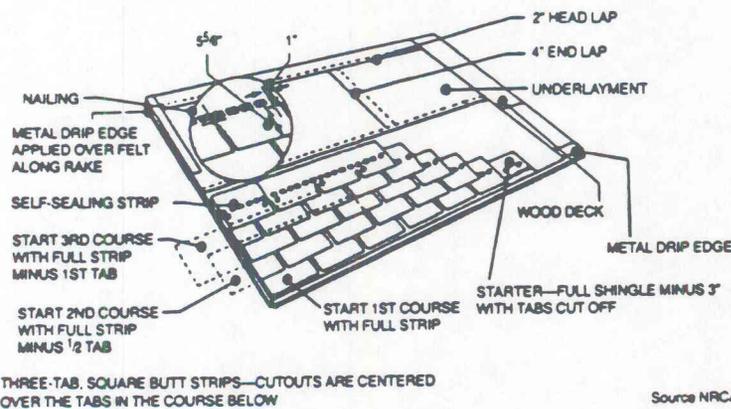

Source NRCA

ASPHALT ROOFING SHINGLES APPLICATION HIGH SLOPE (4:12 MINIMUM)

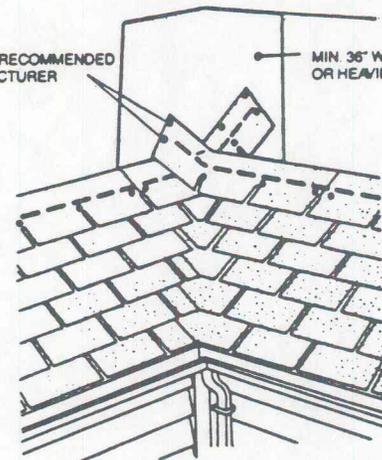

Source NRCA

**DIAGRAM B
ALTERNATE VALLEY FLASHING
(Asphalt Shingles)**