



COMMUNITY DEVELOPMENT PERMIT CENTER




STAIRWAYS

2001 CBC 1003.3.3.3, 1003.3.3.8

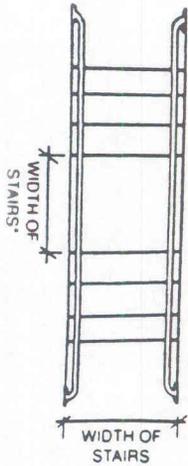


WIDTH OF STAIRS = (1) 36" FOR OCCUPANT LOAD LESS THAN 50
= (2) 44" MINIMUM FOR OCCUPANT LOADS OF 50 OR MORE OR AS REQUIRED BY SECTION 1003.2

*NEED NOT EXCEED 44" IF LANDING OCCURS IN A STRAIGHT RUN OF STAIRS

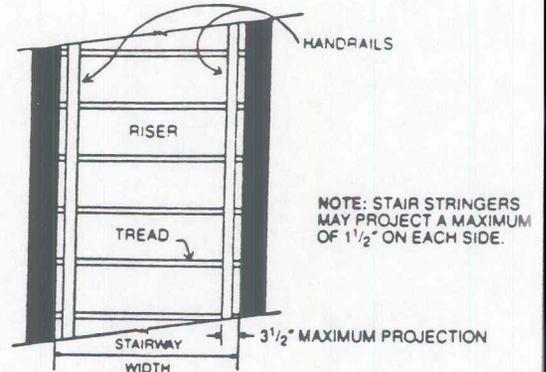


NOTE: STAIR STRINGERS MAY PROJECT A MAXIMUM OF 1 1/2" ON EACH SIDE.

LANDING DIMENSIONS

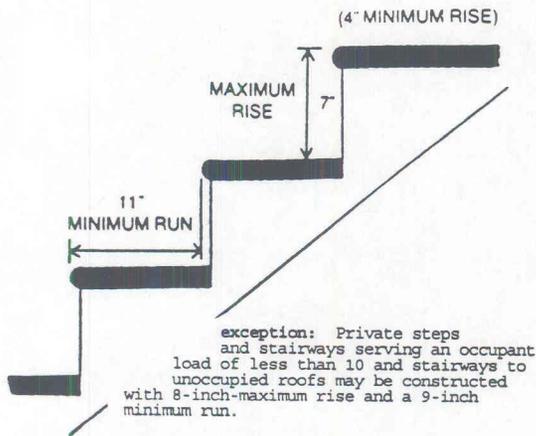


RISE AND RUN

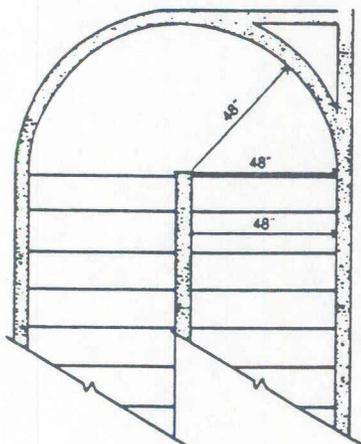


ALTERNATE SHAPE OF LANDING


PROJECTIONS INTO STAIRWAY WIDTH



PLAN VIEW
WINDING STAIRWAY

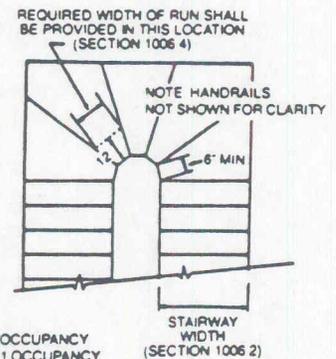


PLAN VIEW
ALTERNATE USE OF WINDERS

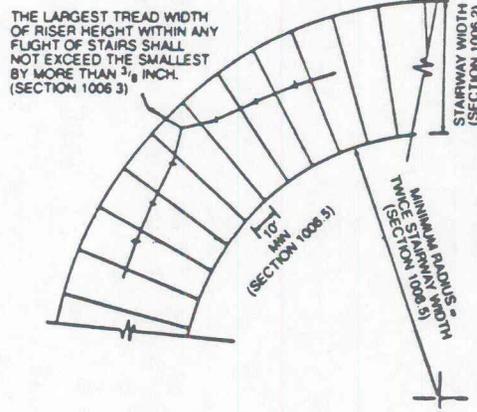

PLAN VIEW
CIRCULAR STAIRWAY

WINDING STAIRS

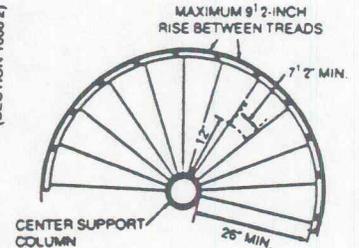

- LIMITATIONS:
1. ONLY APPLIES TO R-3 OCCUPANCY AND PRIVATE STAIRWAYS IN R-1 OCCUPANCIES.
 2. LIMITED TO SERVING AS EXIT FOR 400 SQUARE FEET MAXIMUM.

PLAN VIEW
SPIRAL STAIRWAY