



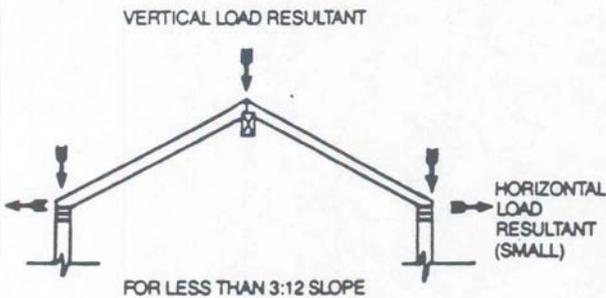


2007 CA BUILDING CODE  
2304.4 & 2304.7

TABLES: 2304.7(3) &  
2304.7 (5)

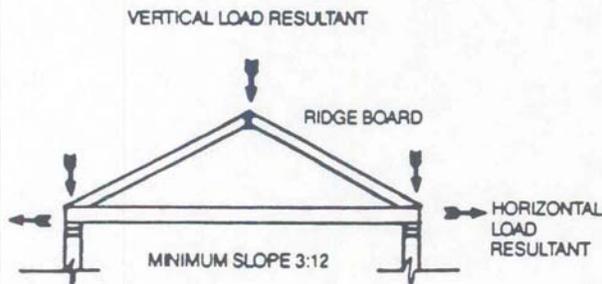


NOTE: FOR OPEN BEAM OR SLOPED CEILINGS, THE RIDGE BEAM MUST BE A DESIGNED MEMBER IN ORDER THAT HORIZONTAL FORCES ARE REDUCED.

ROOF FRAMING

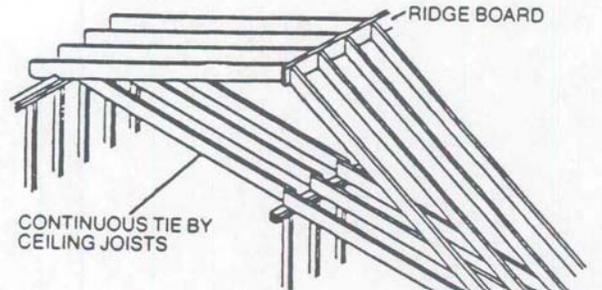


ROOF FRAMING WITH CEILING JOISTS  
PARALLEL TO RAFTERS

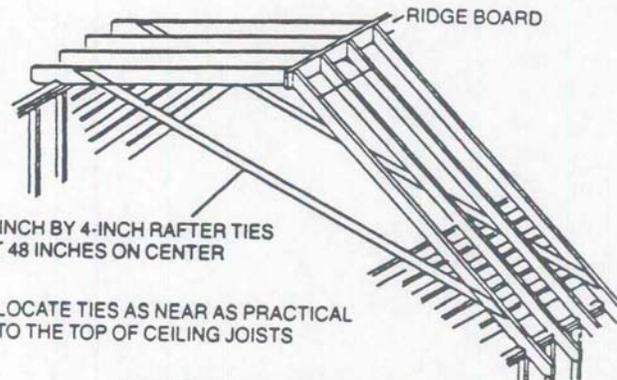

ROOF FRAMING WITH CEILING JOISTS  
NOT PARALLEL TO RAFTERS

RAFTER TIES

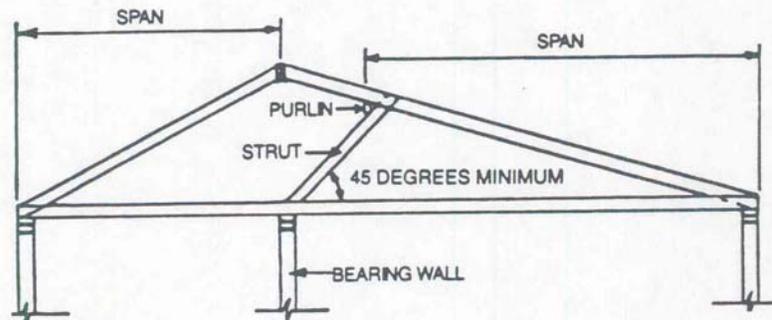

NOTE: RAFTERS MUST FRAME OPPOSITE EACH OTHER AT THE RIDGE (SECTION 2326.12.3).

PURLINS